


## CLASS

A very attractive and durable, polycarbonate luminaire to IP 65 standard for small to large settings. With a choice of finishes, the Class provides a low energy, long life solution for wall or ceiling mounting.

For use in mains and emergency lighting applications.

### Key Features:

- A strong, practical luminaire for internal or external use with cable grommet or tube entry.
- Standard white finish or a choice of Brass (B), or Chrome (C).
- Supplied complete with ballast and choice of energy efficient lamp.
- Impact resistant opal diffuser.
- Suitable for wall or ceiling mounting.
- Integral HF electronic ballast options (H).
- Integral Emergency 3 hour maintained (E) option.

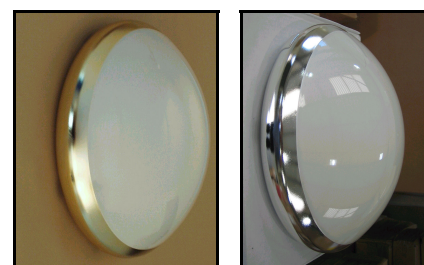

For Use Anywhere:

Halls, Corridors, Conference Centres, Shopping Centres, Hotels, Galleries, Churches, Function Rooms, Schools and Hospitals.

Product	Outer Diameter	Housing Depth	Overall Depth	Rim Width
Class	330 mm	60 mm	126 mm	15 mm

## PRODUCT CODES

Product Code	Lamp	Base Colour	Option Suffixes
107-052	16W2D	B/C	H, E
107-053	18W	B/C	H, E
107-054H	22W	B/C	E
107-055	28W2D	B/C	H, E
107-056	38W2D	B/C	H, E
107-062H	55W	B/C	E
107-063H	2x26W	B/C	E
107-064H	2x32W	B/C	E

## The *NorLight* Range

### Andolite Limited

Unit 21 Hopkinson Way  
West Portway Industrial Estate  
Andover  
Hampshire. SP10 3LF

Telephone: 01264 356445  
Fax: 01264 334401  
Email: sales@andolite.co.uk,  
Website: www.andolite.co.uk  
Website: www.norlight.co.uk

For reliability and safety, we only use brand name modules and lamps